Measure Diagram D-1 NEW DRIVESHAFT MEASUREMENT

Measure For Street and Race Vehicles:

Note: Vehicle should be measured with wheels and axles under normal load with rear end supported on safety jack stands as if the vehicle was sitting normally on the roadway. The rear end should never be measured with the rear suspension hanging down out of normal position

It will be one of these three choices 1-1/16, 1-1/8, 1-3/16


Note: If you need help or are unsure, please call our professional staff to answer your questions

This diagram is to illustrate measurement for:

ARIZONA DRIVESHAFT

480-898-1957

Mountain Standard Time (non daylight savings) 7:00 AM to 5:00 PM Mon - Fri Closed Weekends and Holidays

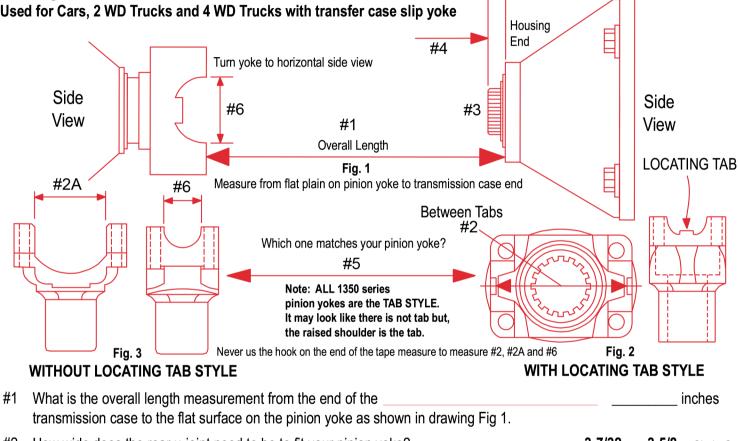

3-7/32 How wide does the rear u-joint need to be to fit your pinion yoke? 3-5/8Circle One If your pinion yoke has the 2 locating tabs then measure between the 2 locating tabs ... Fig. 2 then measure between the 2 tabs. You measurement should be 3-7/32 or 3-5/8 #2A If your pinion yoke does not have the 2 locating tabs inches then measure between the 2 flat surfaces as shown in Fig 3. #3 T-400 & 4L80 Transmission only Output shaft has a threaded hole in the end YES NO Circle One #4 How far does the output shaft stick out past the end of the transmission case. inches Compress the seal if necessary #5 The PINION YOKE HAS the Locating Tab YES Circle One Note 1350 Billet pinion yokes are a TAB STYLE design Circle the U-Joint CAP DIAMETER that fits into the pinion yoke 1-1/16 1-1/8 1-3/16 Circle One

Copyright © 2010 Arizona Driveshaft